




Multi-Conductor Cables

SOLID MULTI-CONDUCTOR CABLE

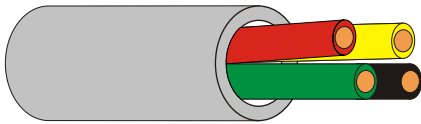

DESCRIPTION:

- Solid bare copper conductor 24 or 22 AWG
- Semirigid PVC insulation
- PVC Jacket

SPECIFICATIONS:

NEC 800
UL-444
ETL Listed
CMR or CL2R

NEC 725
RoHS

APPLICATION:

Burglar alarm, audio control systems, limited circuits.

Standards lengths of 1000 ft or 500 ft, in reels or boxes.

Product Code	Gauge	Number of Conductors	Insulation Thickness	Jacket Thickness	Overall Diameter	Net Weight Lb/mft
631737	24	4	0.006"	0.0135"	0.110"	9
631722	22	2	0.006"	0.0135"	0.105"	7
631724	22	4	0.006"	0.0135"	0.124"	12
631726	22	6	0.006"	0.0135"	0.148"	18
631728	22	8	0.006"	0.0135"	0.170"	22
631731	22	12	0.006"	0.0135"	0.186"	32

*All values are nominal, and subject to manufacturing tolerances.

Conductor Gauge AWG	Conductor Resistance D.C. Maximum Ω /kft 20°C	Temperature Rating	Voltage Rating
24	26.20	60°C	300 V
22	16.20	60°C	300 V