


**RoHS**



# Multi-Conductor Cables

## THERMOSTAT CABLE

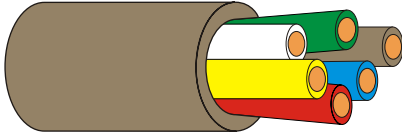

**DESCRIPTION:**

- Solid copper conductors 20 and 18 AWG
- Semirigid PVC insulation
- Sunlight resistant PVC Jacket

**SPECIFICATIONS:**

NEC 725 UL-13 ETL Listed

**RoHS**

**APPLICATION:**

Thermostat, air condition control, heating control, intercom systems.

**STANDARD LENGTH**

Standard lengths of 500 ft or 250 ft, reels.

\*All values are nominal, and subject to manufacturing tolerances.

Product Code	Gauge	Number of Conductors	Insulation Thickness	Jacket Thickness	Overall Diameter	Net Weight Lb/kft
666510	18	2	0.0075"	0.013"	0.126"	14
666511	18	3	0.0075"	0.013"	0.129"	20
666512	18	4	0.0075"	0.013"	0.161"	27
666513	18	5	0.0075"	0.013"	0.185"	33
666514	18	6	0.0075"	0.013"	0.185"	40
666516	18	8	0.0075"	0.013"	0.265"	52
666520	20	2	0.006"	0.013"	0.105"	10
666521	20	3	0.006"	0.013"	0.106"	13
666522	20	4	0.006"	0.013"	0.131"	18
666523	20	5	0.006"	0.013"	0.150"	22
666524	20	6	0.006"	0.013"	0.150"	26
666525	20	7	0.006"	0.013"	0.210"	31
666527	20	9	0.006"	0.013"	0.224"	38

Conductor Gauge AWG	Conductor Resistance D.C. Maximum $\Omega$ /kft @ 20°C	Temperature Rating °C	Voltage Rating
20	10.12	60	300 V
18	6.40	60	300 V